

~~SECRET~~  
#4

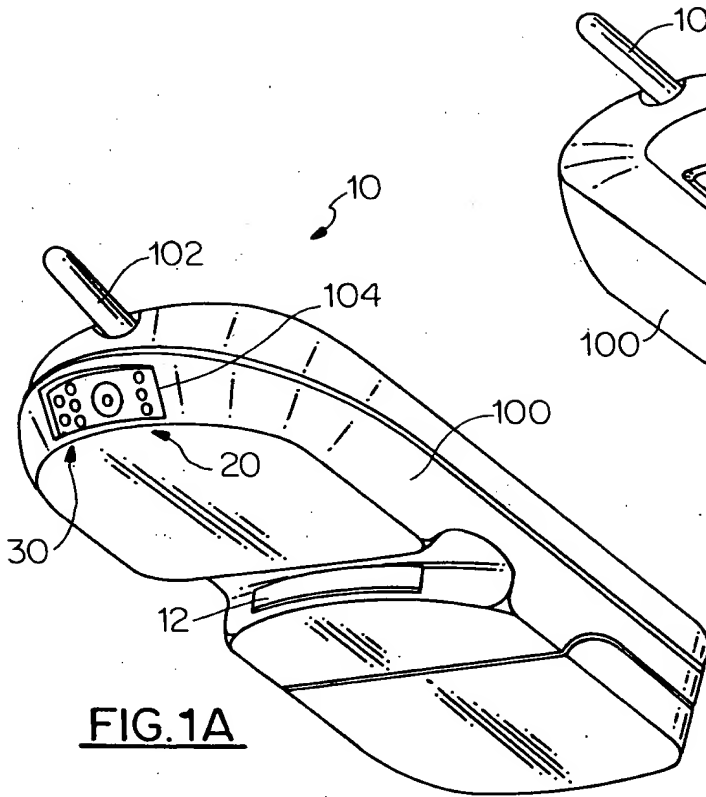


FIG. 1A

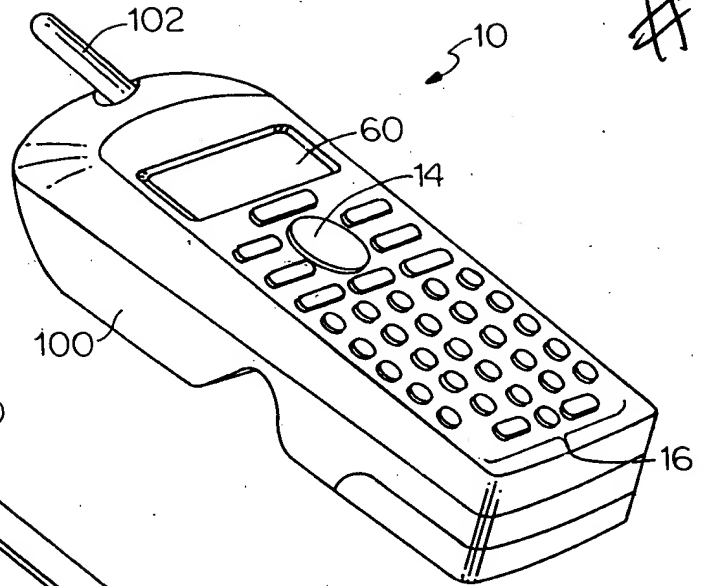


FIG. 1B

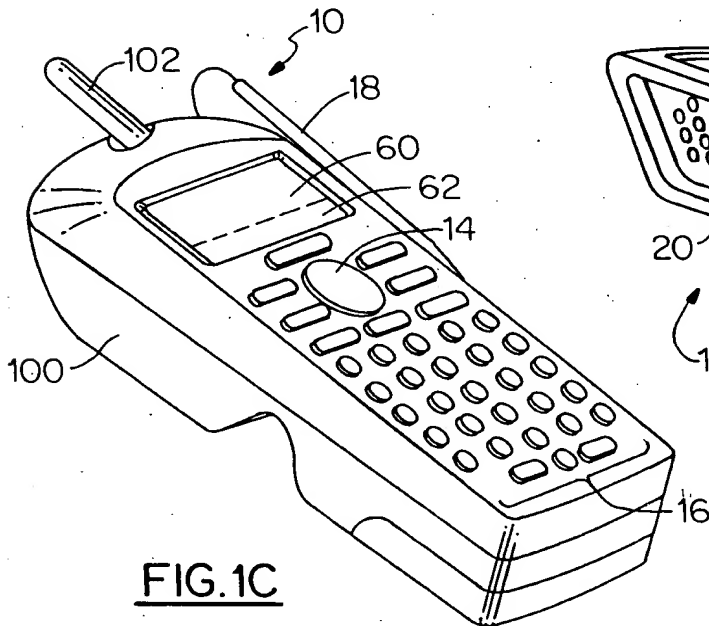


FIG. 1C

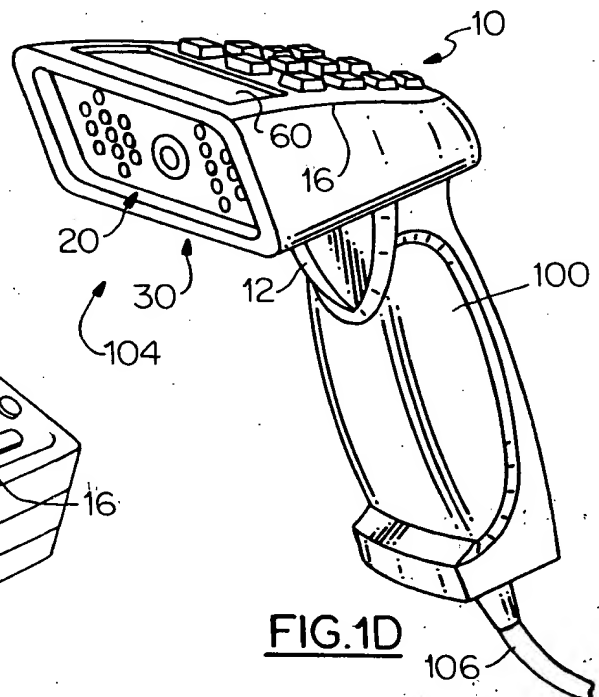


FIG. 1D



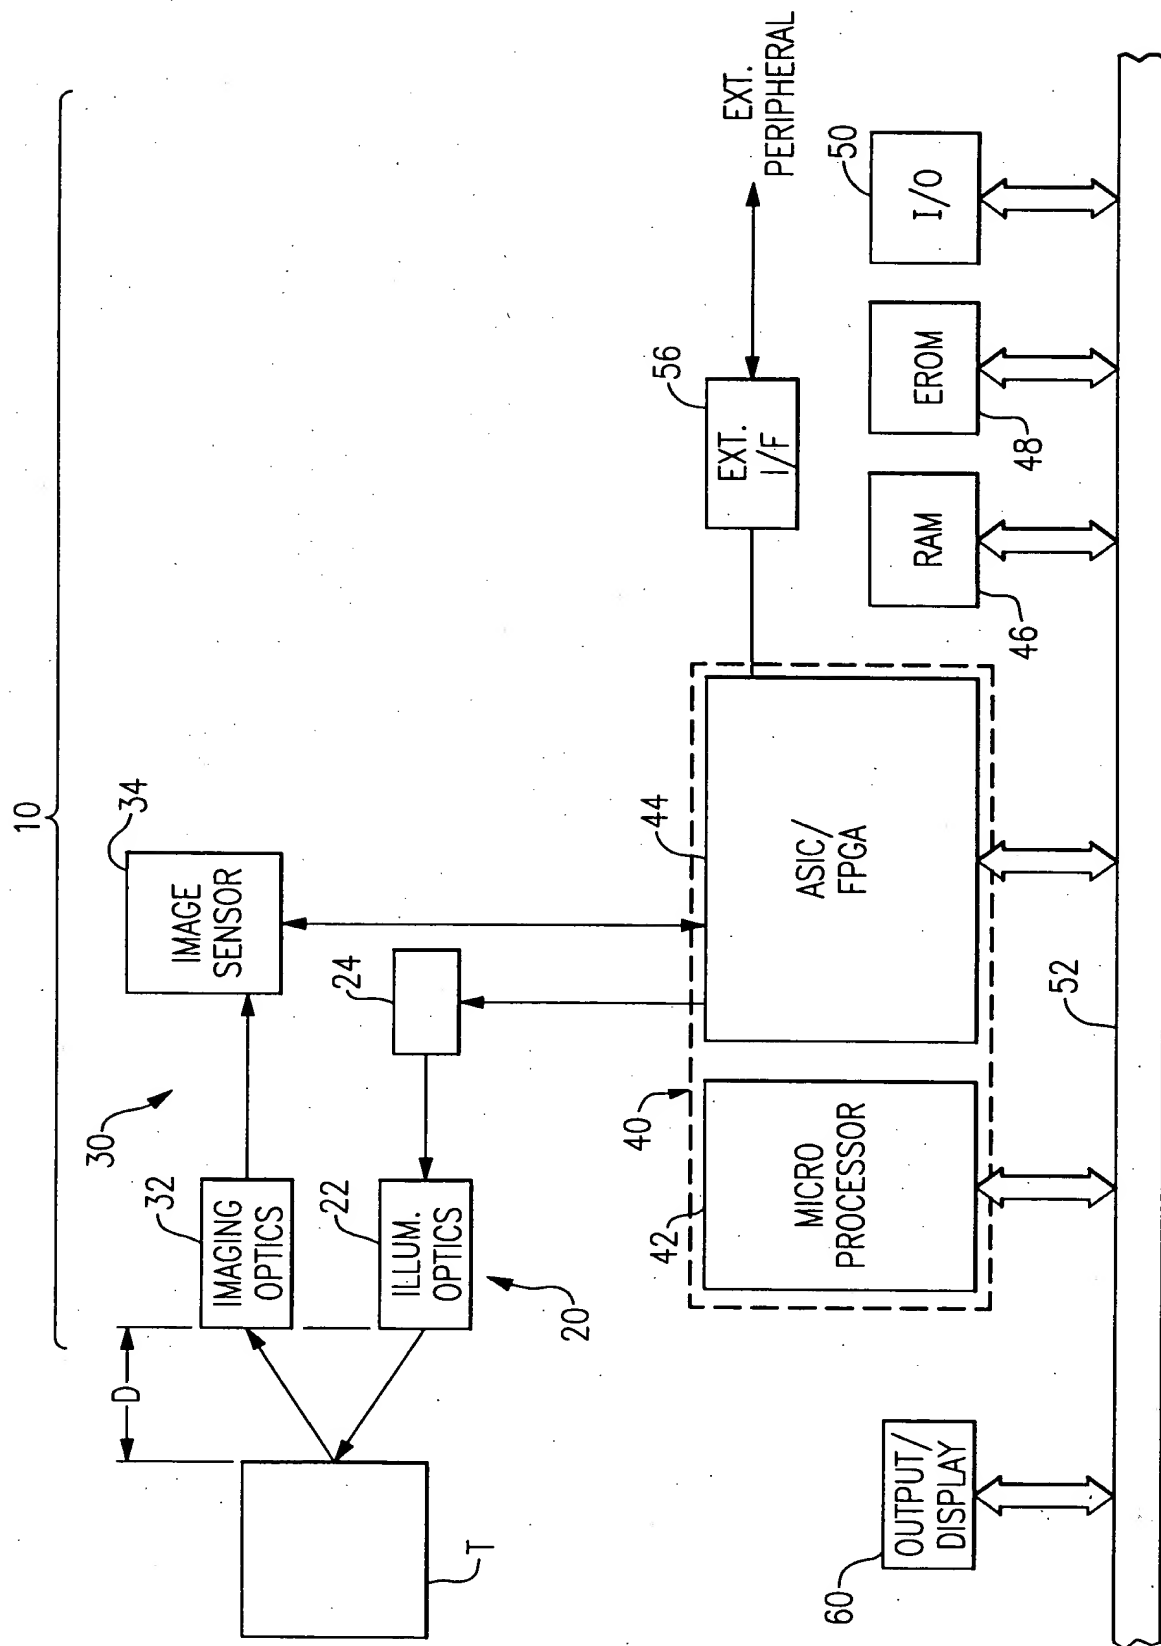



FIG. 2


**FIG.3**

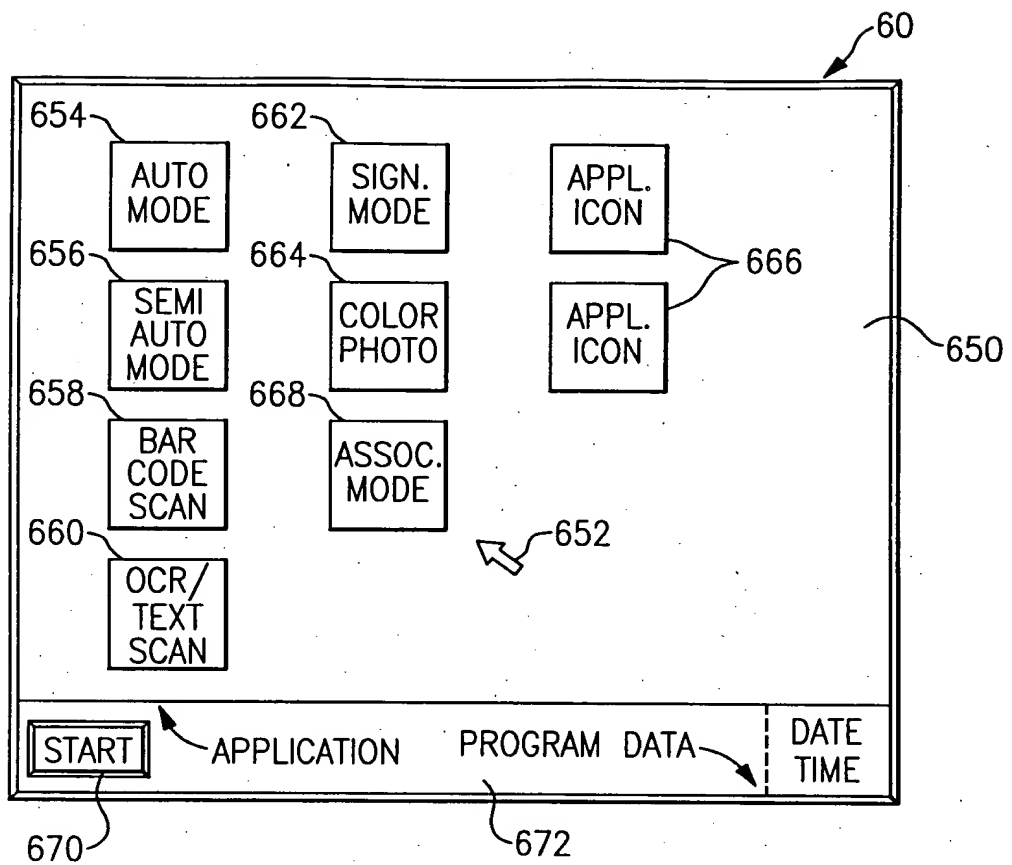


**FIG.13**

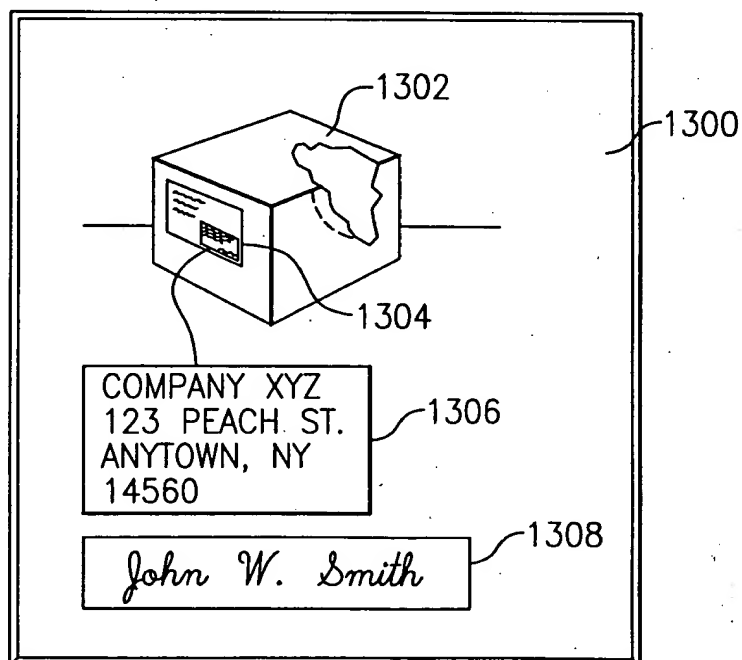

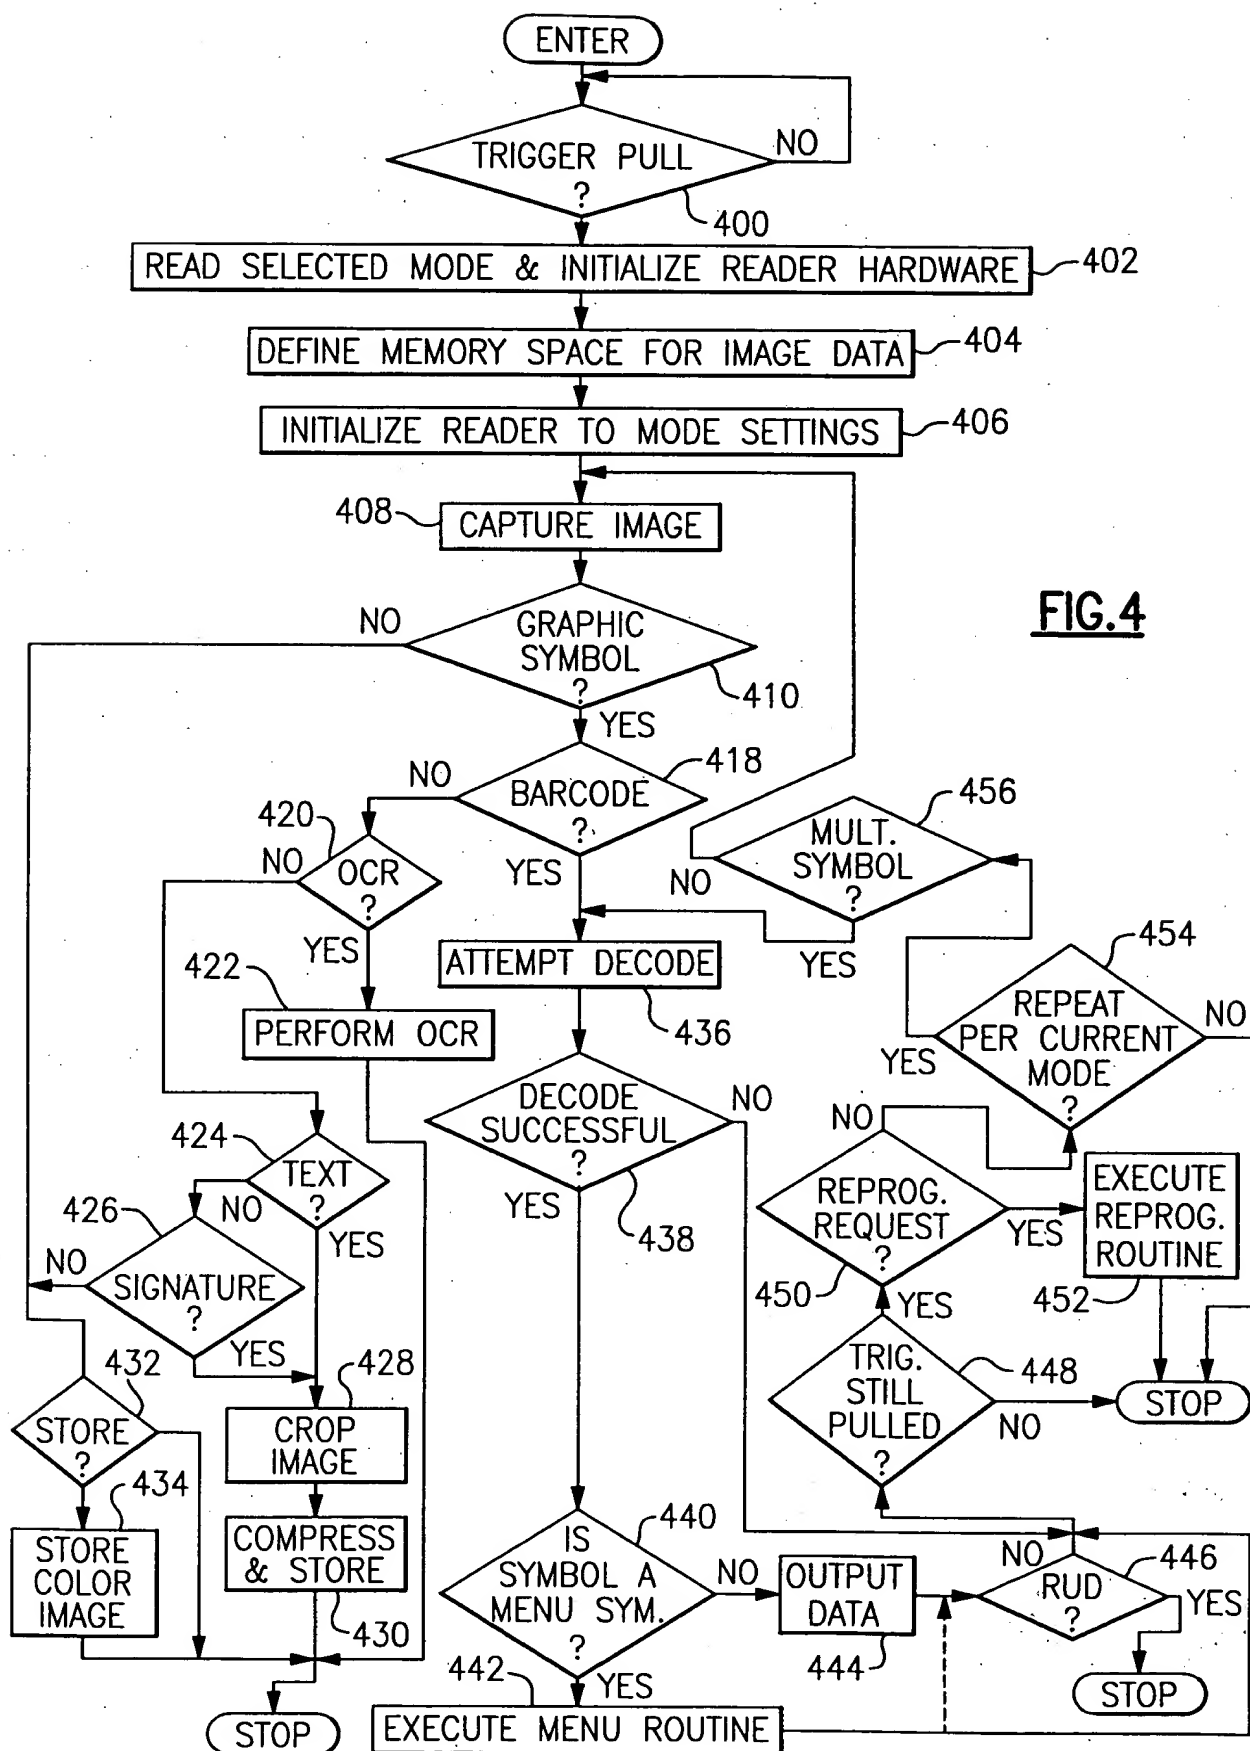

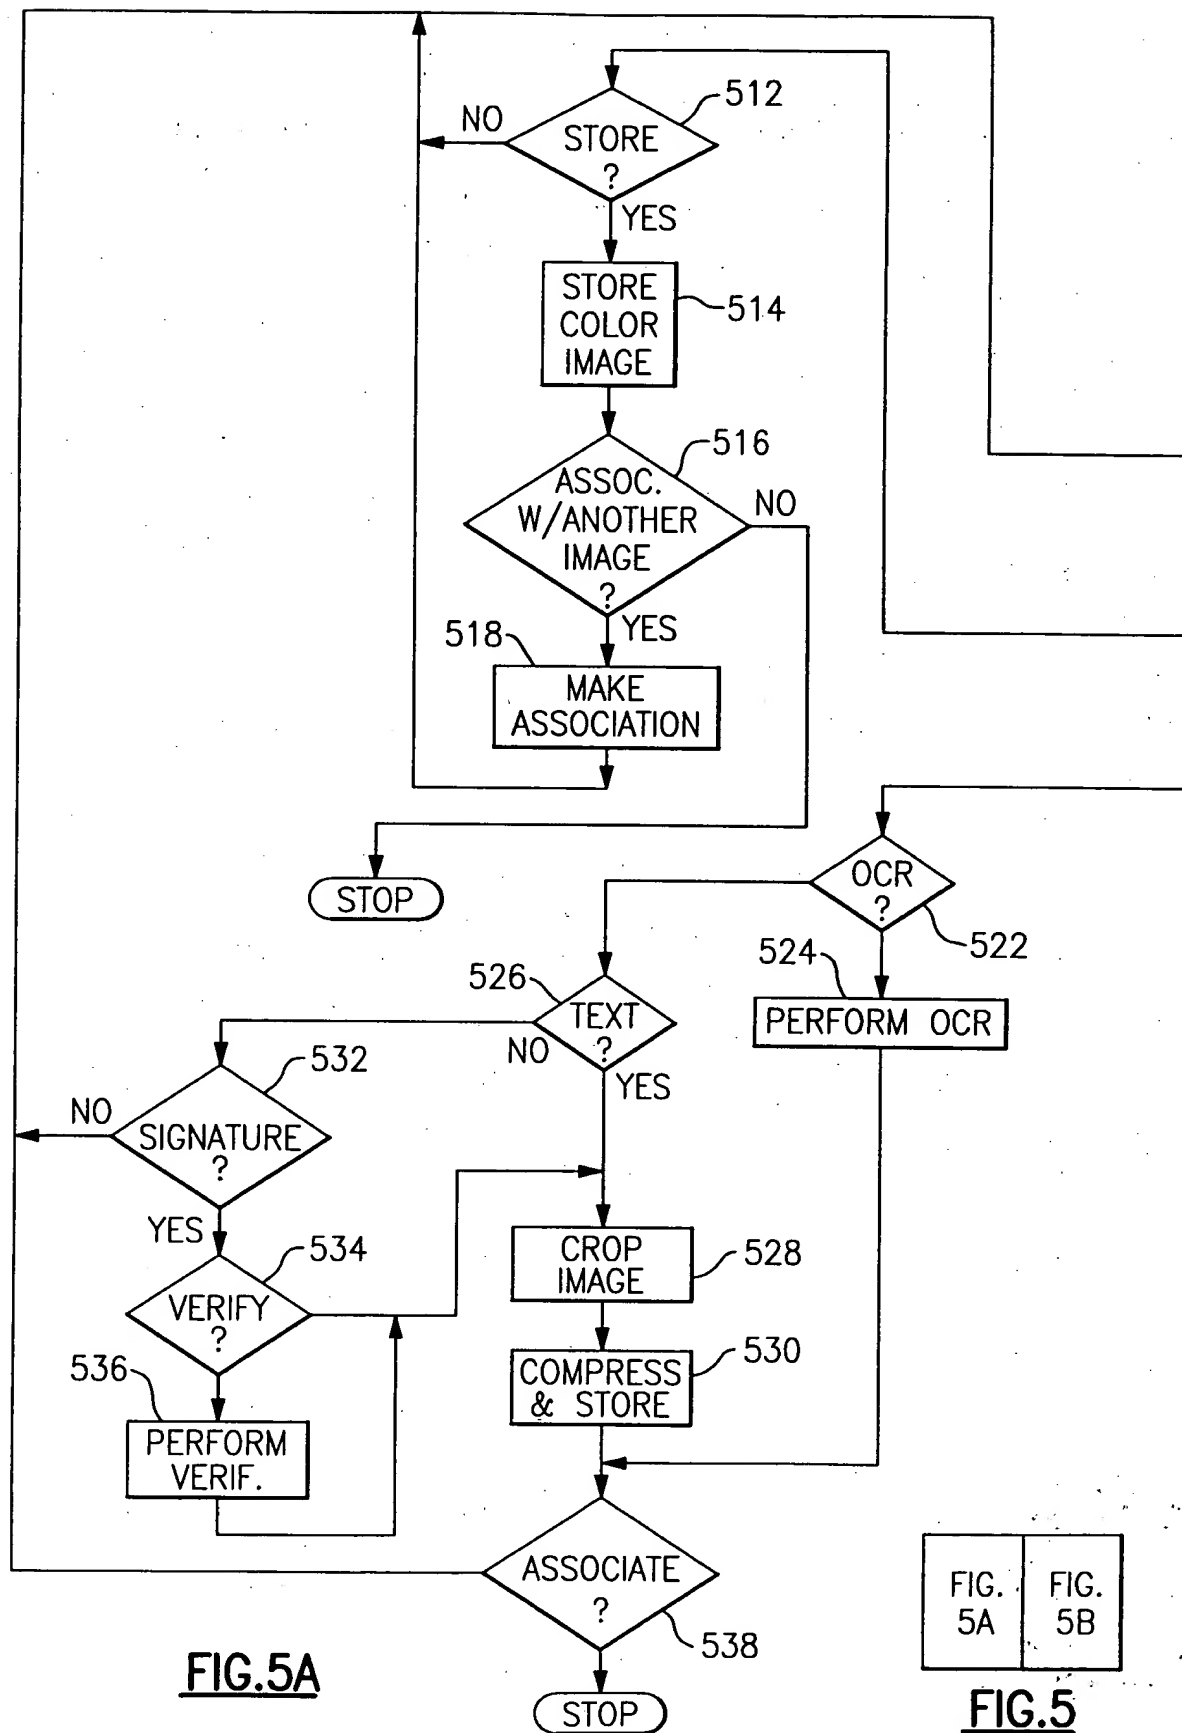


**FIG.5A**



**FIG.5**

# THE UNIVERSITY OF CHICAGO



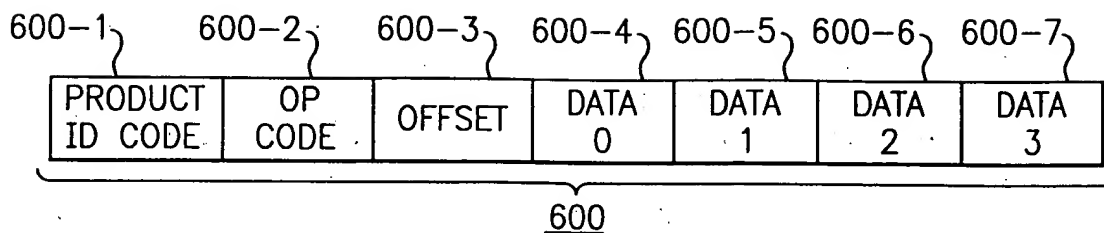

**FIG.6A**

OPTIONS (OFFSET) TABLE

- A. COMMUNICATIONS OPTIONS
  - 1. RS-232
  - 2. BAUD RATE
  - 3. RF LINK
  - 4. ETHERNET
- B. CODE OPTIONS
  - 1. DISABLE 1D
  - 2. DISABLE 2D
  - 3. DISABLE INDIV.
  - 4. MIN-MAX LENGTH
  - 5. MULTIPLE SYMBOLS ENABLED
- C. SCANNING-DECODING OPTIONS
  - 1. ONE SHOT
  - 2. REPEAT UNTIL DONE
  - 3. REPEAT UNTIL STOPPED
  - 4. SCAN ON DEMAND
  - 5. SKIP SCAN
  - 6. DECODE ON DEMAND
- D. OPERATING OPTIONS
  - 1. BEEPER VOLUME
  - 2. AIMING LED ON/OFF
  - 3. AURAL FEEDBACK
- E. TRANSMIT OPTIONS
  - 1. SEND CHECK CHAR'S
  - 2. SEND CHECKSUM
  - 3. DATA EDIT OPTIONS
- F. READER MODE OPTIONS
  - 1. AUTOMATIC
  - 2. SEMI-AUTOMATIC
  - 3. BAR CODE SCANNING
  - 4. OCR
  - 5. SIGNATURE
  - 6. COLOR IMAGING


OP CODE TABLE

- A. OP CODE "0"-VECTOR PROC.
  - 1. OUTPUT VERSION OF SOFTWARE
  - 2. OUTPUT CONTENTS OF PARAMETER TABLE
  - 3. DISPLAY ENABLED CODES
  - 4. PRINT PARAMETER TABLE AS BAR CODE SYMBOL
- B. OP CODE "1" - CLEAR
- C. OP CODE "2" - SET
- D. OP CODE "3" - TOGGLE
- E. OP CODE "4" - ADD
- F. OP CODE "5" - DEFAULT
- G. OP CODE "6" - LOAD
- H. OP CODE "7" - RESERVED

**FIG.6C**

**FIG.6B**

133001 6570660

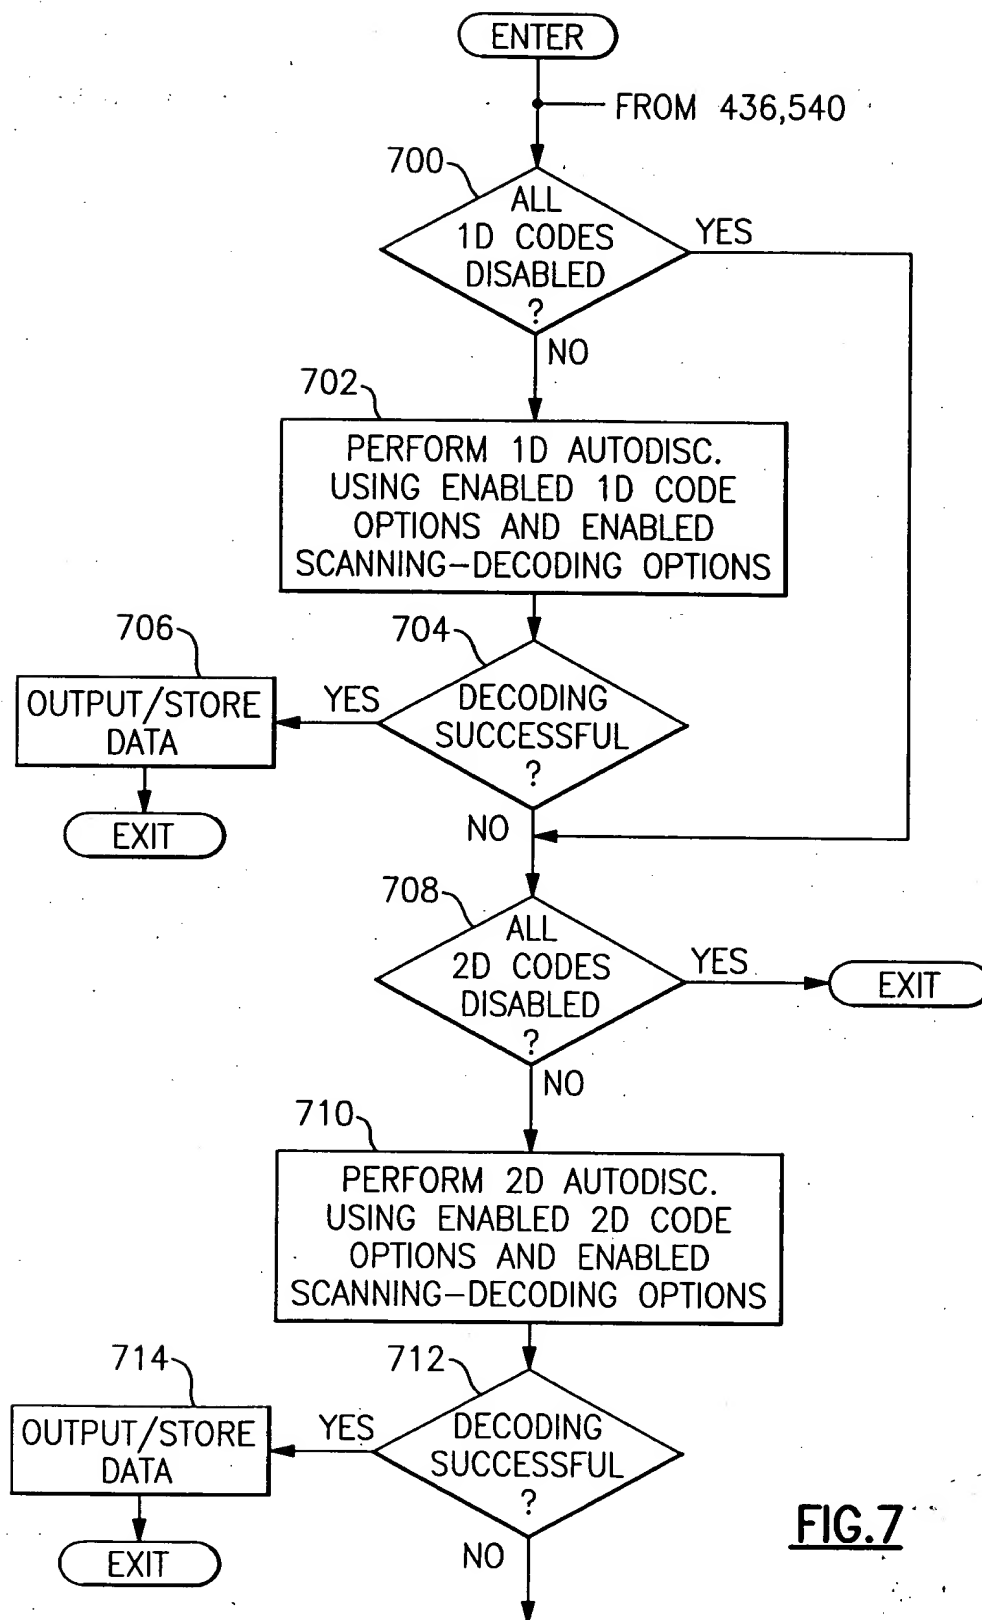

**FIG. 7**





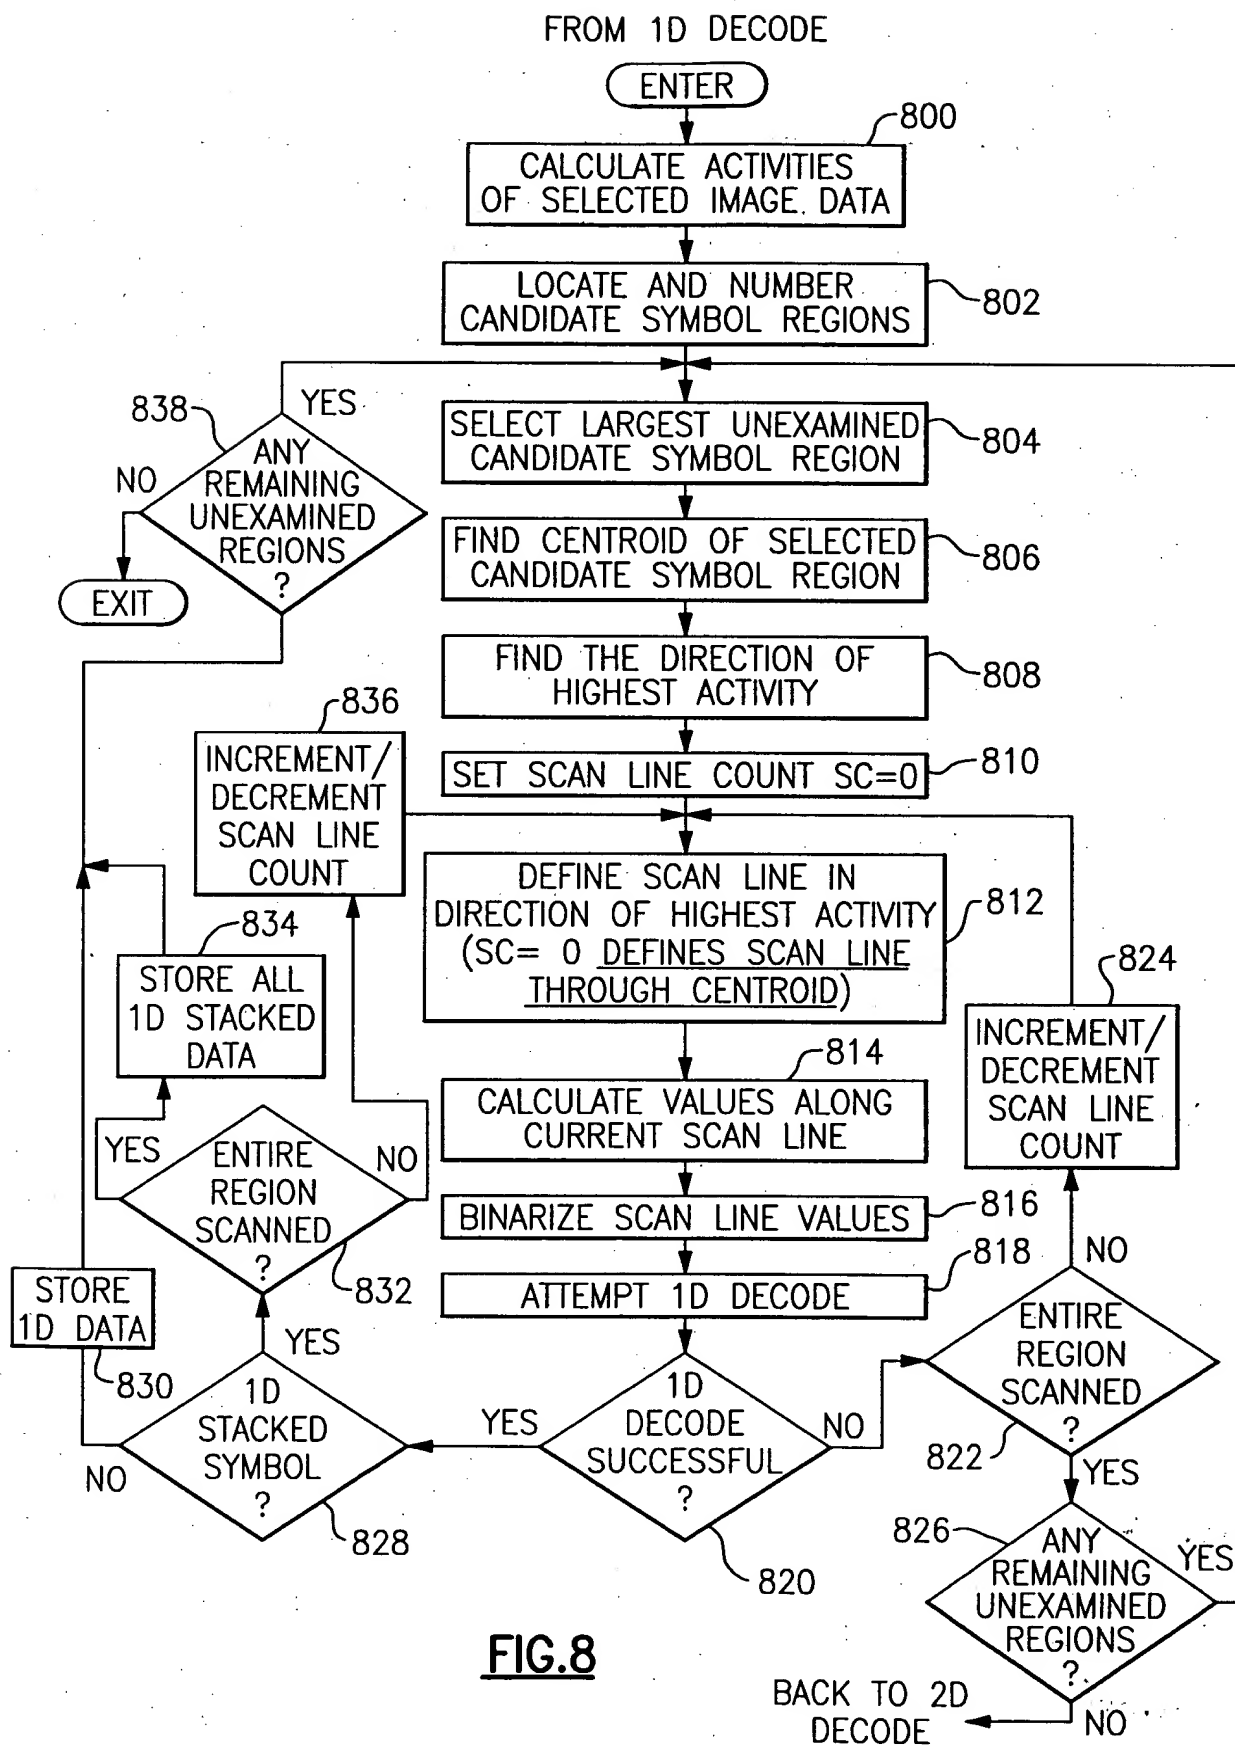


FIG.8


**SECRET**

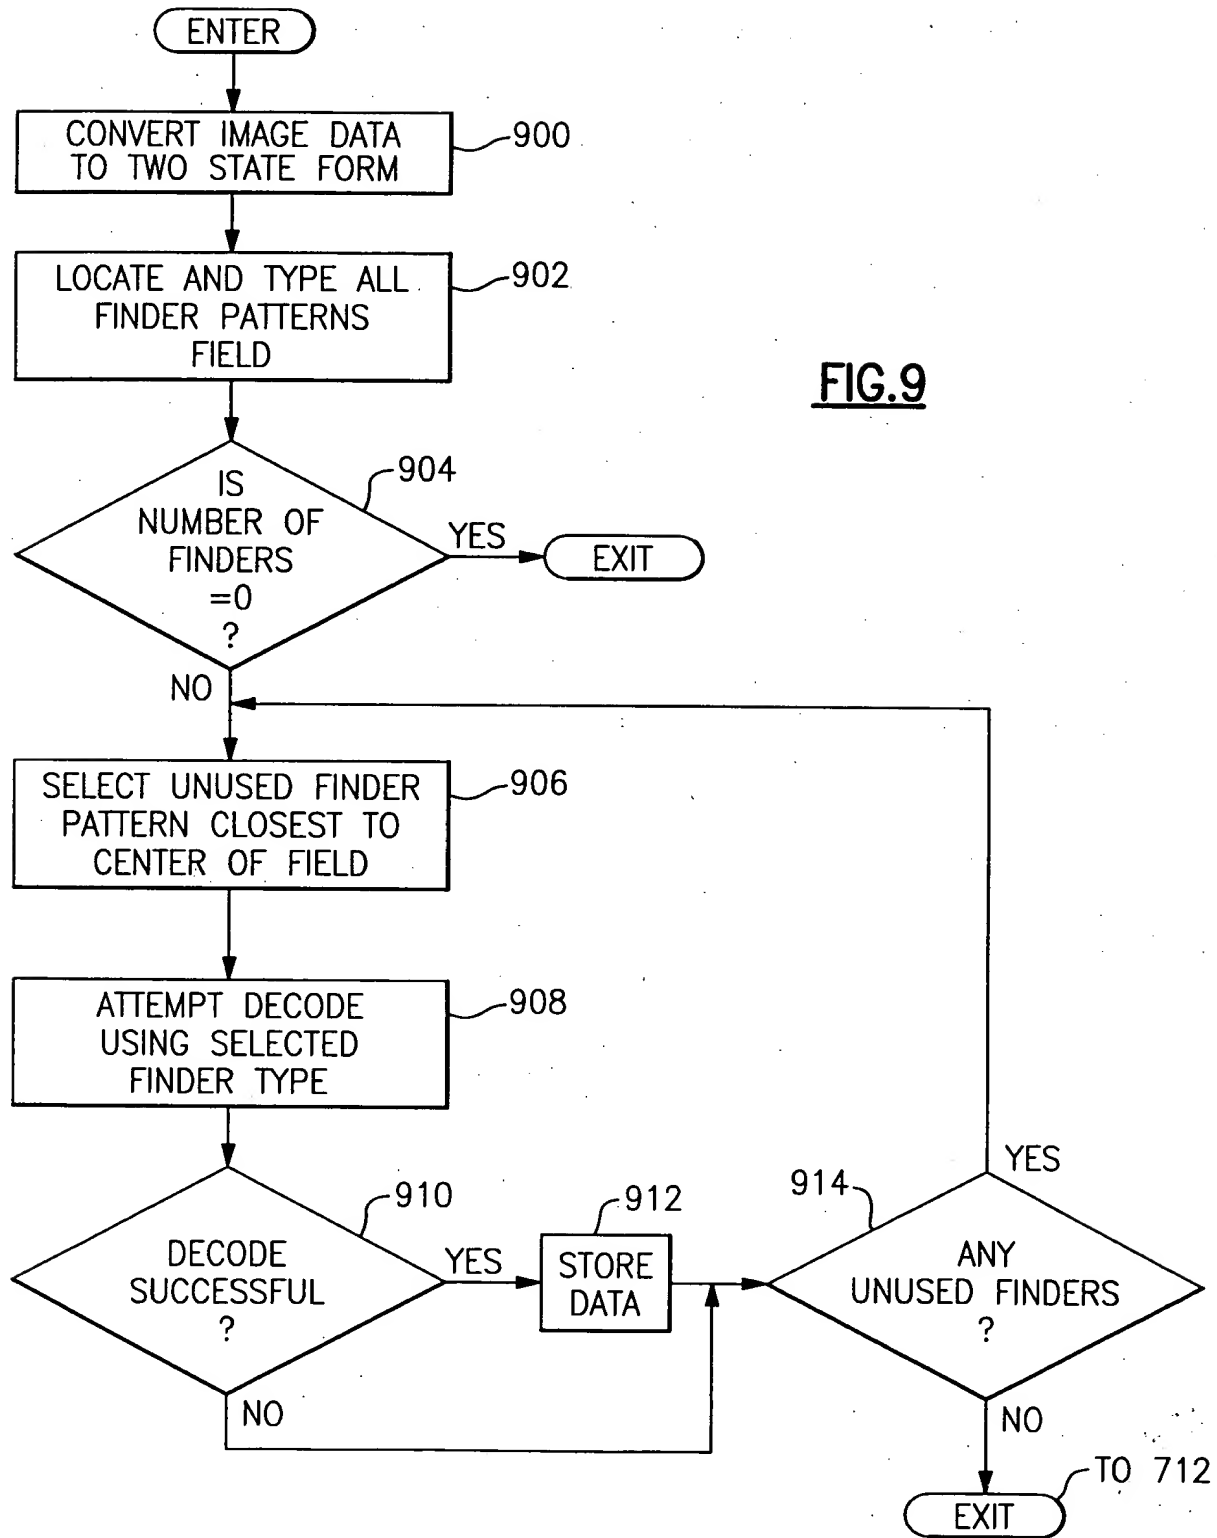

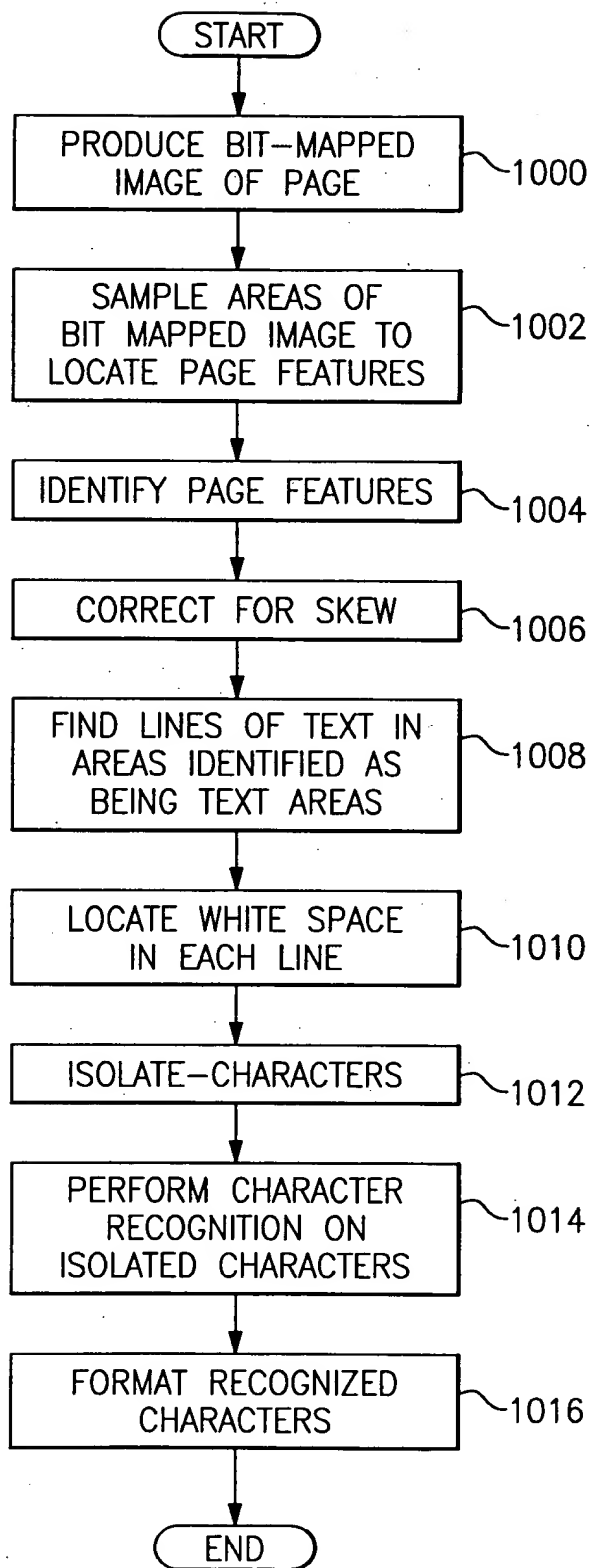


**FIG.10**

09904697 100501

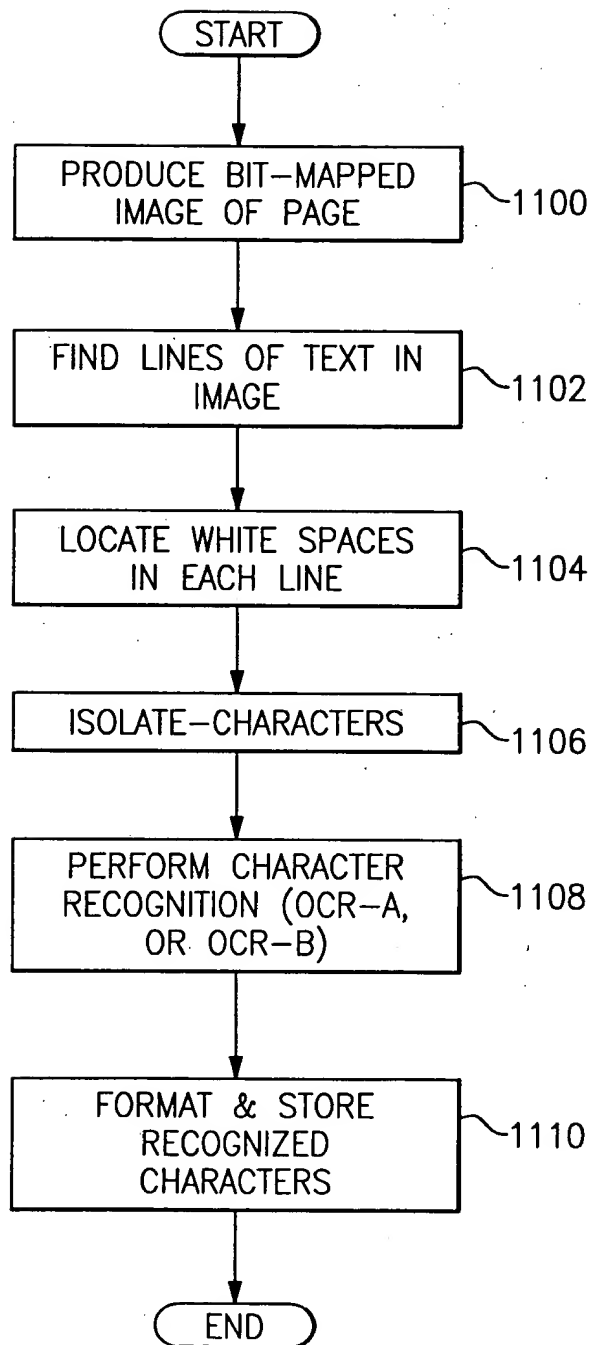

**FIG.11**

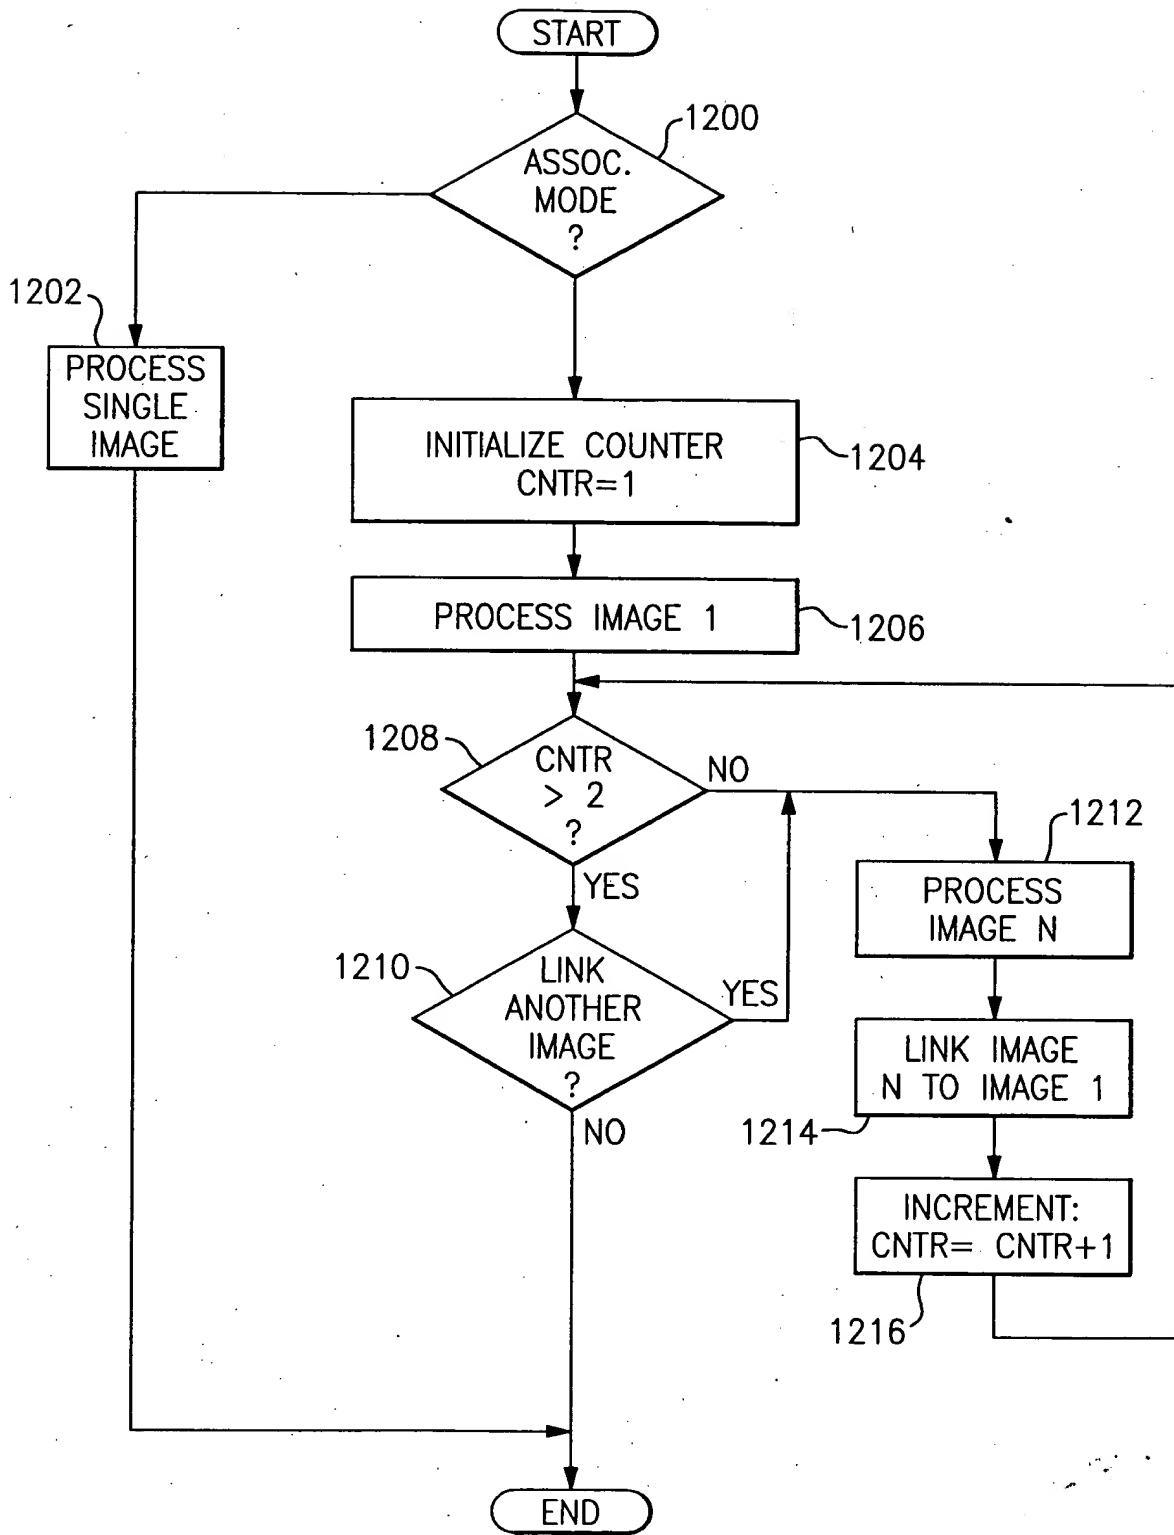

**FIG.12**

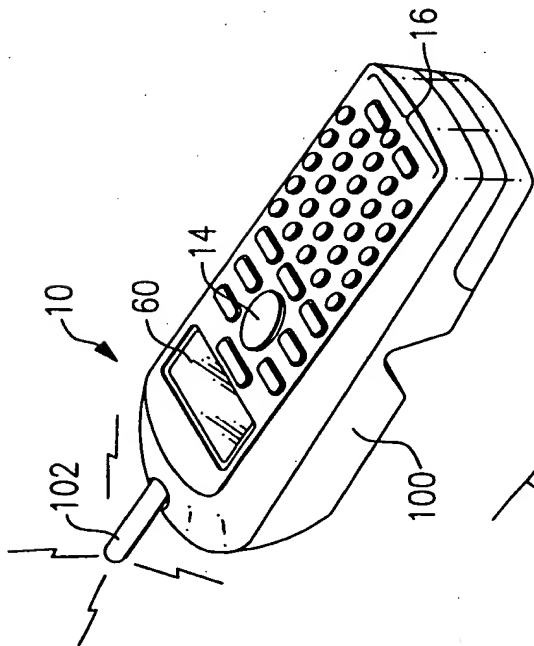


FIG. 14

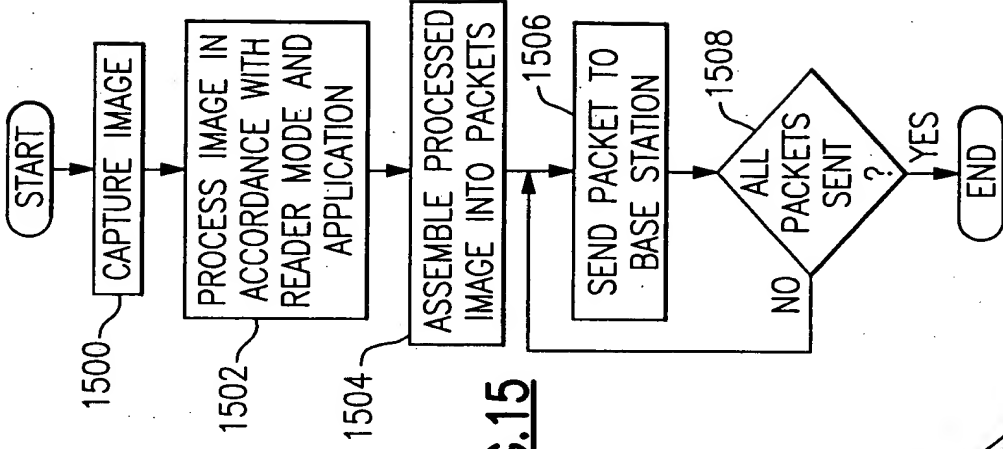


FIG. 15

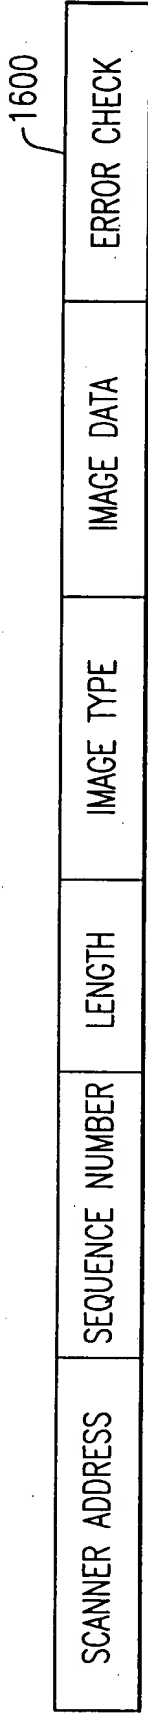


FIG. 16A



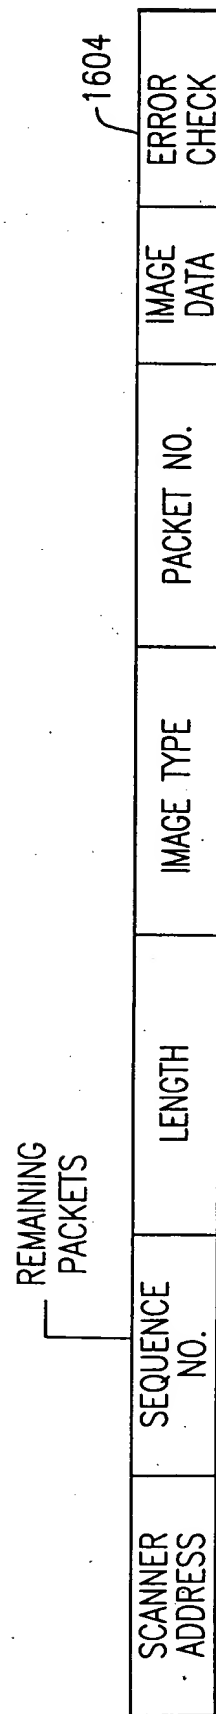



FIG. 16B

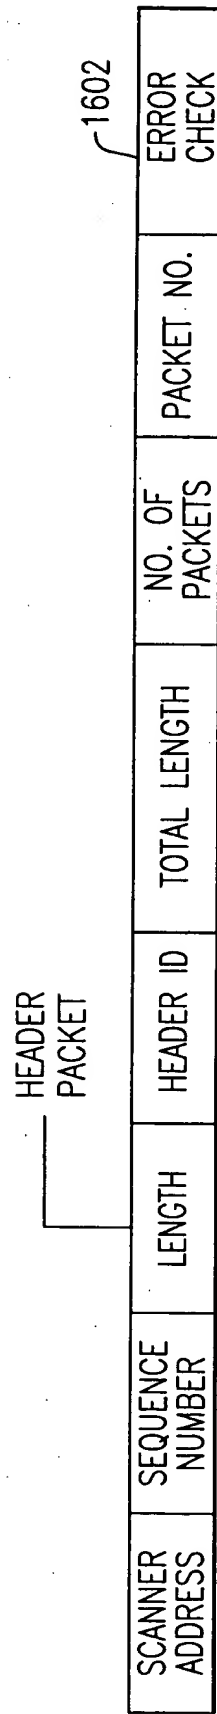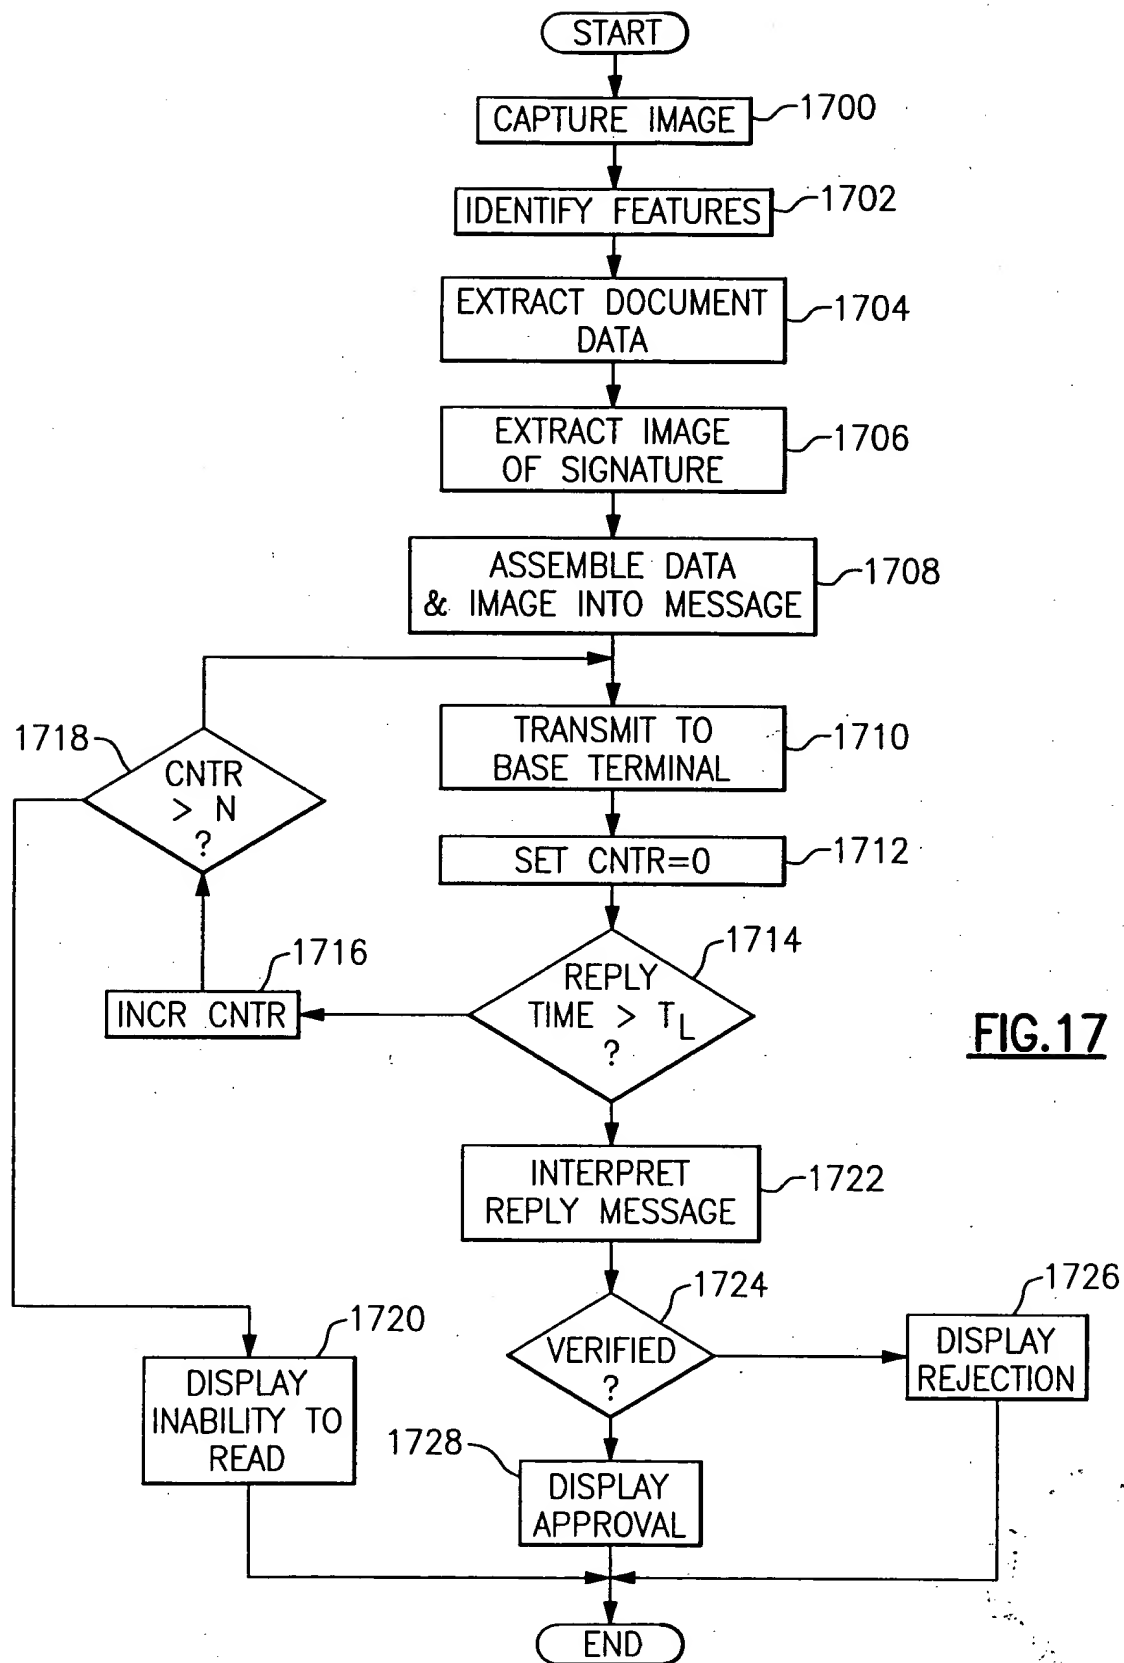

**FIG.17**



FIG. 18

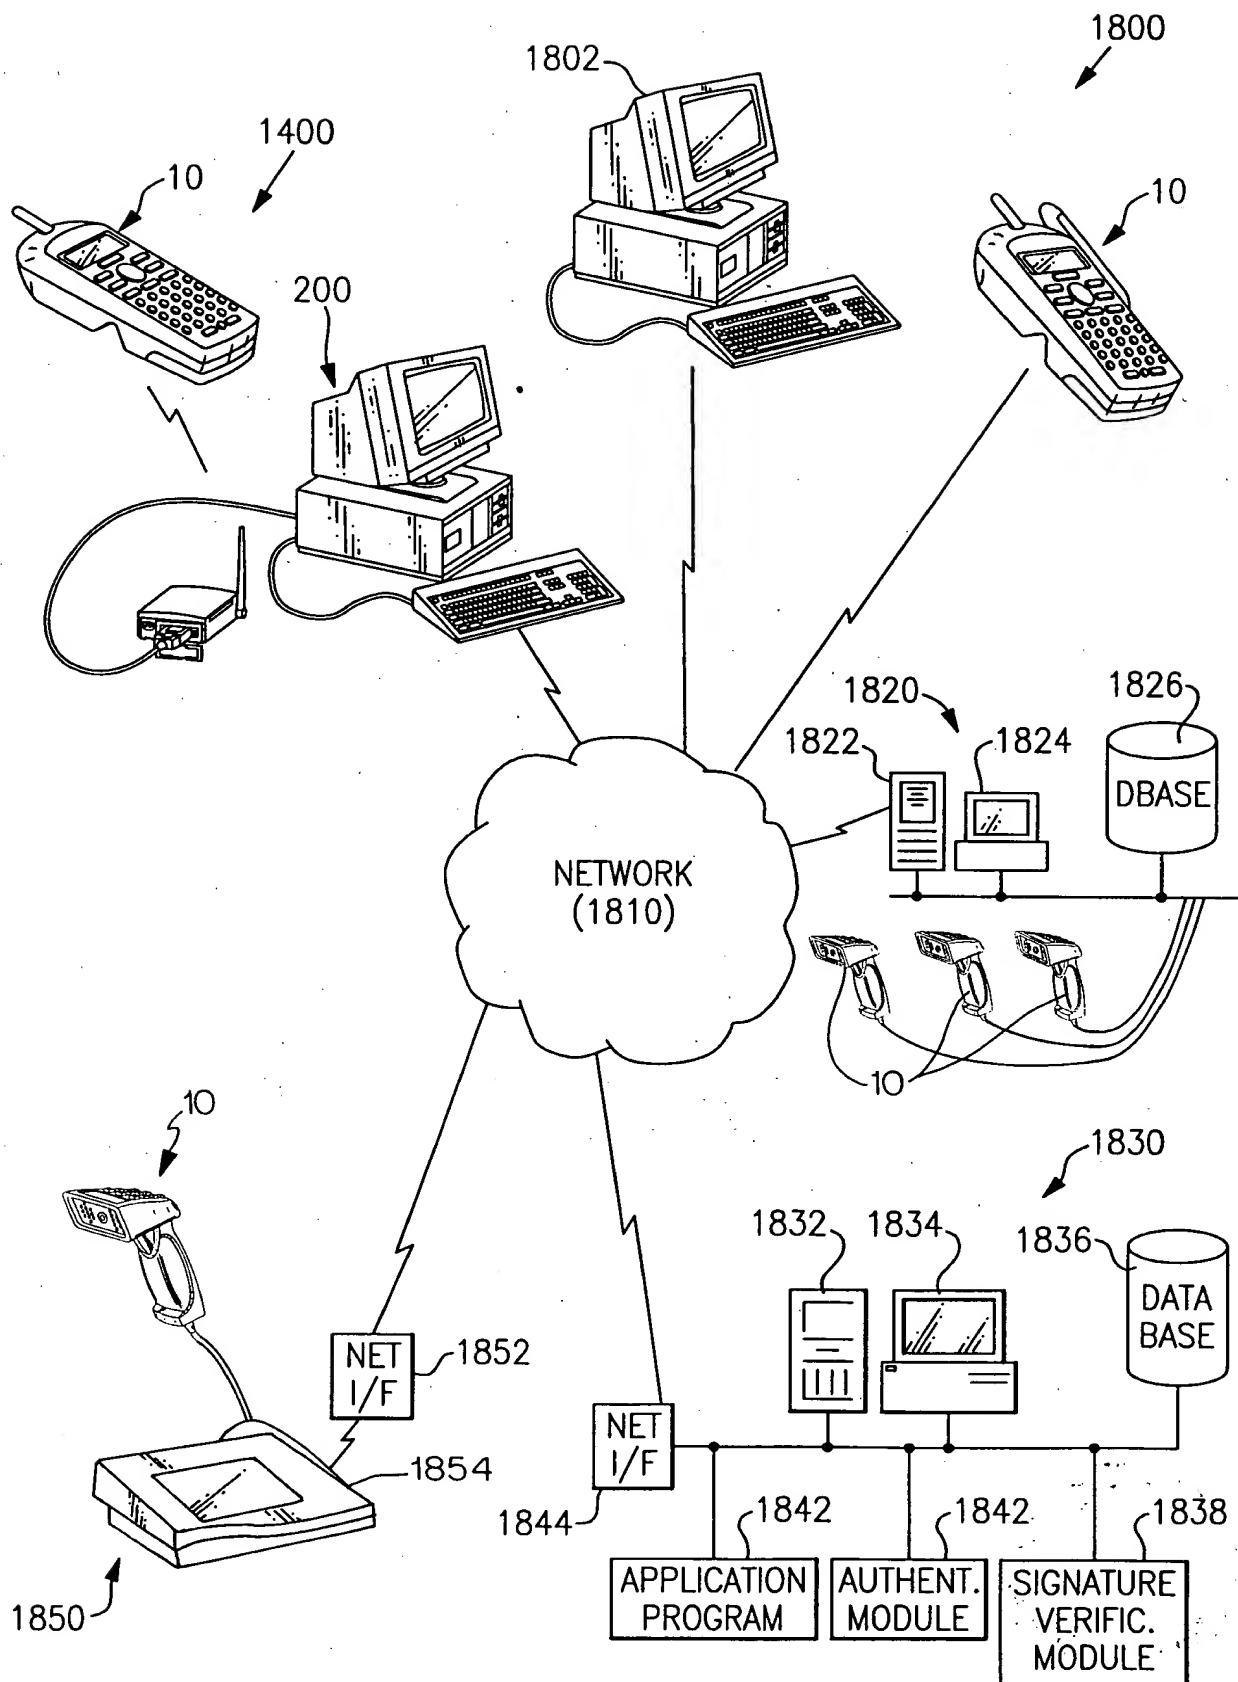

**FIG.18**